

FK **FUKE** 福客®

FK310-9

下天贏信誠

酬商酬人酬天
信道善道勤道






FK310-9

Total Weight: 31640 kg

Standard bucket capacity: 1.43 m³

Rated power: 186/252.9 kW/ps

- New generation product
- Exquisite
- Reliable structure
- Excellent performance
- Small and efficient
- Convenient maintenance
- Cost-effective

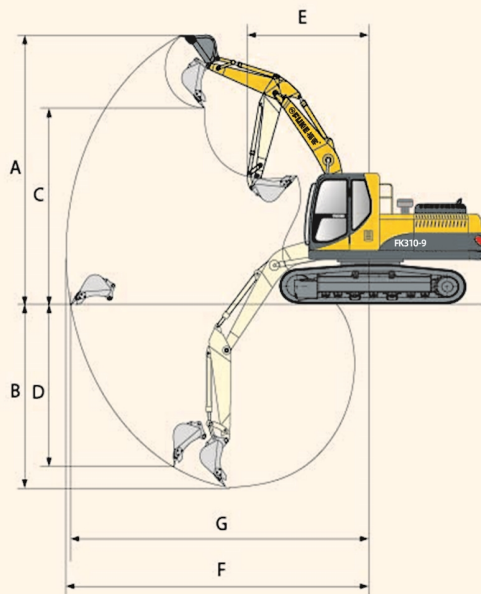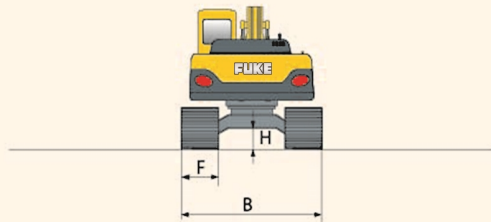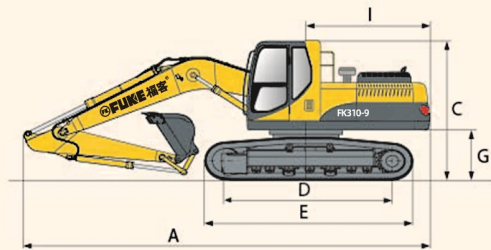

► Technical specifications

Basic parameters

Total Weight	31640 kg
Standard bucket capacity	1.43 m ³

Performance parameter

Engine	Cummins
Engine rated power	186/252.9 kW/ps
Gradeability	35 °
Maximum digging force of stick	128 kN
Bucket excavation	175 kN
Driving speed	3.1-5.2 km/h
Platform rotation speed	10-11 rpm

Job parameters

Maximum digging height	10190 mm	A
Maximum digging depth	7305 mm	B
Maximum unloading height	7165 mm	C
Maximum vertical digging distance	5745 mm	D
Minimum radius of gyration	3825 mm	E
Maximum digging distance	10620 mm	F
Maximum ground excavation distance	10420 mm	G

Transport size

Overall length (transport state)	10795 mm	A
Overall width (transport state)	3260 mm	B
Overall height (transport state)	3160 mm	C

Other parameters

Bucket width	1463 mm	
Wheelbase	4030 mm	D
Track length	4961 mm	E
Track width	600 mm	F
Counterweight ground clearance	1244 mm	G
Minimum ground clearance	530 mm	H
Radius of tail gyration	3308 mm	I

安徽福客重工设备有限公司
Anhui Fuke Heavy Industry Equipment Co., Ltd.

Contact us:

Phone/Whatsapp:+8613901687527

Email:fk002@fukebn.com/hesun525@gmail.com

www.fukeonline.com

